

HTK-2G-TKR (loose, pre-assembled)



Cross references

DABO® TKR-4.8
 Stress plate HTK-2G 50
 Bit cross recess
 Bit extension with spring pin
 Hip belt flat roof



Application range

- > To fix roofing membranes and insulating material to substructures made of sheet steel $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$, timber or wood-based material
- > For new buildings
- > For the installation with ECOSET HTK installation tool up to 280 mm total panel thickness
- > For special requirements of resistance to imposed loads
- > To reduce thermal bridges

Properties

- > Stress plate: high-grade plastic material
- > DABO® screw TKR = case-hardened steel, Climadur®-coated
- > Telescope design for resistance to imposed loads
- > Combinations for total panel thicknesses up to 605 mm possible
- > Processing in an upright position possible with the bit extension with spring pin or with the ECOSET HTK installation tool


Note

Upon request also available with VHT-R and VHT-E


*Climadur

High-grade coating to improve the corrosion protection (15 Kesternich cycles, DIN 50018, 1997)


HTK-2G-TKR-60-35/50

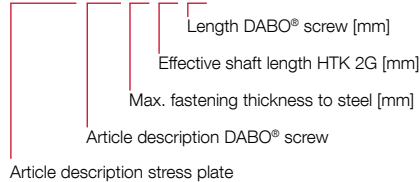

Applications



Technical specifications



Certifications



Watch the video now:

<https://youtu.be/APy8zklr-tQ&list>

Product online



Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-TKR-60-35/50-loose, pre-assembled	60	35	50	100		3703505024	4061245031729
HTK-2G-TKR-80-55/50-loose, pre-assembled	80	55	50	100		3705505024	4061245031736
HTK-2G-TKR-100-55/70-loose, pre-assembled	100	55	70	100		3705507024	4061245031620
HTK-2G-TKR-120-95/50-loose, pre-assembled	120	95	50	100		3709505024	4061245032108
HTK-2G-TKR-140-95/70-loose, pre-assembled	140	95	70	100		3709507024	4061245031644
HTK-2G-TKR-160-115/70-loose, pre-assembled	160	115	70	100		3711507024	4061245031651
HTK-2G-TKR-180-145/60-loose, pre-assembled	180	145	60	100		3714506024	4061245031668
HTK-2G-TKR-200-145/80-loose, pre-assembled	200	145	80	100		3714508024	4061245031675
HTK-2G-TKR-220-145/100-loose, pre-assembled	220	145	100	100		3714510024	4061245031682
HTK-2G-TKR-240-145/120-loose, pre-assembled	240	145	120	100		3714512024	4061245031699
HTK-2G-TKR-260-145/140-loose, pre-assembled	260	145	140	100		3714514024	4061245031705
HTK 2G-TKR-280-145/160-loose, pre-assembled	280	145	160	100		3714516024	4061245031712
HTK 2G-TKR-300-145/180-loose, pre-assembled	300	145	180	100		3714518024	4061245040684
HTK 2G-TKR-320-145/200-loose, pre-assembled	320	145	200	100		3714520024	4061245040677
HTK 2G-TKR-340-145/220-loose, pre-assembled	340	145	220	100		3714522024	4061245040660
HTK 2G-TKR-360-185/200-loose, pre-assembled	360	185	200	100		3718520024	4061245040653

Order information: For timber substructures, screws need to be chosen 10 mm longer.