

HTK-2G-TKR (loose, pre-assembled)



Cross references

DABO® TKR-4.8
Stress plate HTK-2G 50
Bit cross recess
Bit extension with spring pin
Hip belt flat roof


Application range

- > To fix roofing membranes and insulating material to substructures made of sheet steel $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$, timber or wood-based material
- > For new buildings
- > For the installation with ECOSET HTK installation tool up to 280 mm total panel thickness
- > For special requirements of resistance to imposed loads
- > To reduce thermal bridges


Properties

- > Stress plate: high-grade plastic material
- > DABO® screw TKR = case-hardened steel, Climadur coated - high-quality coating to improve corrosion protection (15 Kesternich cycles, DIN 50018)
- > Telescope design for resistance to imposed loads
- > Combinations for total panel thicknesses up to 605 mm possible
- > Processing in an upright position possible with the bit extension with spring pin or with the ECOSET HTK installation tool

Applications



Technical specifications



Certifications




Notice

Upon request also available with VHT-R and VHT-E

Product online



HTK-2G-TKR-60-35/50

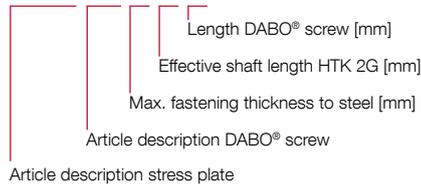

Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-TKR-60-35/50-loose, pre-assembled	60	35	50	100		3703505024	4061245031729
HTK-2G-TKR-80-55/50-loose, pre-assembled	80	55	50	100		3705505024	4061245031736
HTK-2G-TKR-100-55/70-loose, pre-assembled	100	55	70	100		3705507024	4061245031620
HTK-2G-TKR-120-95/50-loose, pre-assembled	120	95	50	100		3709505024	4061245032108
HTK-2G-TKR-140-95/70-loose, pre-assembled	140	95	70	100		3709507024	4061245031644
HTK-2G-TKR-160-115/70-loose, pre-assembled	160	115	70	100		3711507024	4061245031651
HTK-2G-TKR-180-145/60-loose, pre-assembled	180	145	60	100		3714506024	4061245031668
HTK-2G-TKR-200-145/80-loose, pre-assembled	200	145	80	100		3714508024	4061245031675
HTK-2G-TKR-220-145/100-loose, pre-assembled	220	145	100	100		3714510024	4061245031682
HTK-2G-TKR-240-145/120-loose, pre-assembled	240	145	120	100		3714512024	4061245031699
HTK-2G-TKR-260-145/140-loose, pre-assembled	260	145	140	100		3714514024	4061245031705
HTK 2G-TKR-280-145/160-loose, pre-assembled	280	145	160	100		3714516024	4061245031712
HTK 2G-TKR-300-145/180-loose, pre-assembled	300	145	180	100		3714518024	4061245040684
HTK 2G-TKR-320-145/200-loose, pre-assembled	320	145	200	100		3714520024	4061245040677
HTK 2G-TKR-340-145/220-loose, pre-assembled	340	145	220	100		3714522024	4061245040660
HTK 2G-TKR-360-185/200-loose, pre-assembled	360	185	200	100		3718520024	4061245040653

Order information: For timber substructures, screws need to be chosen 10 mm longer.